

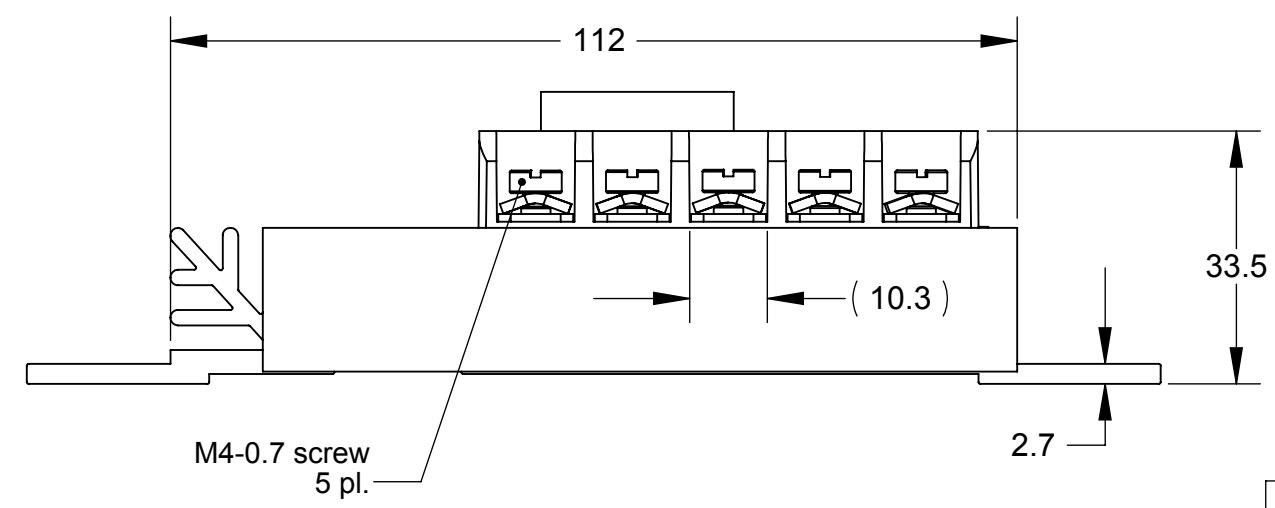
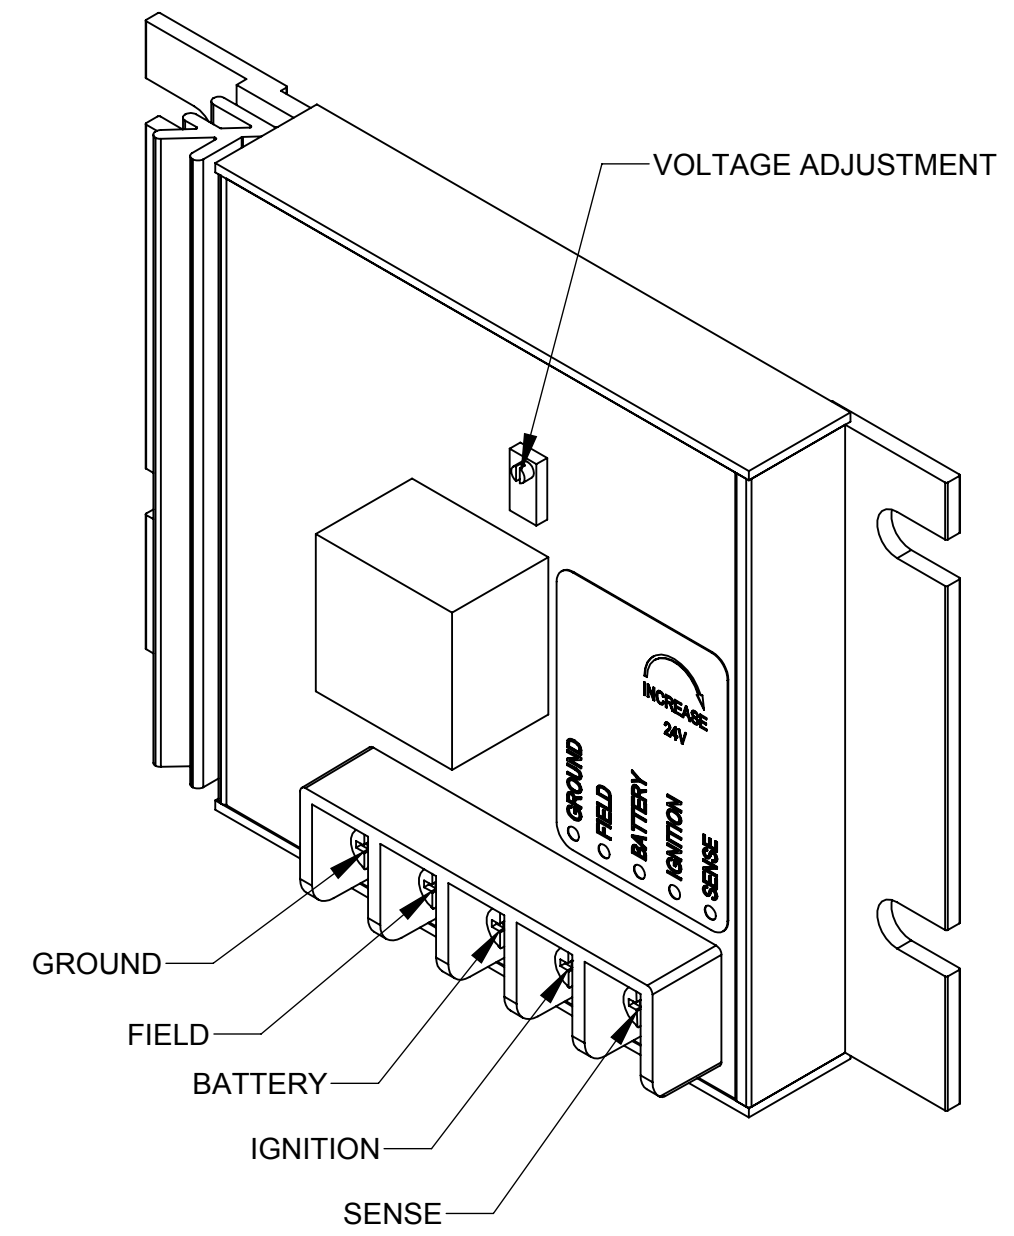


NO.	REVISION	DATE	IN'L

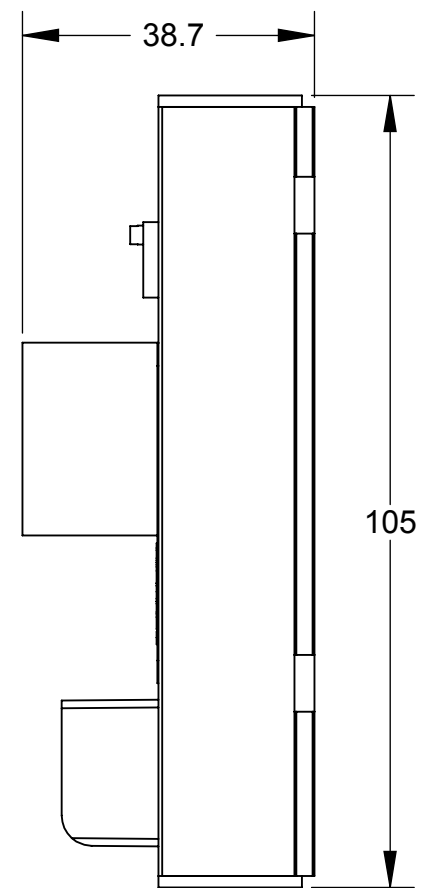

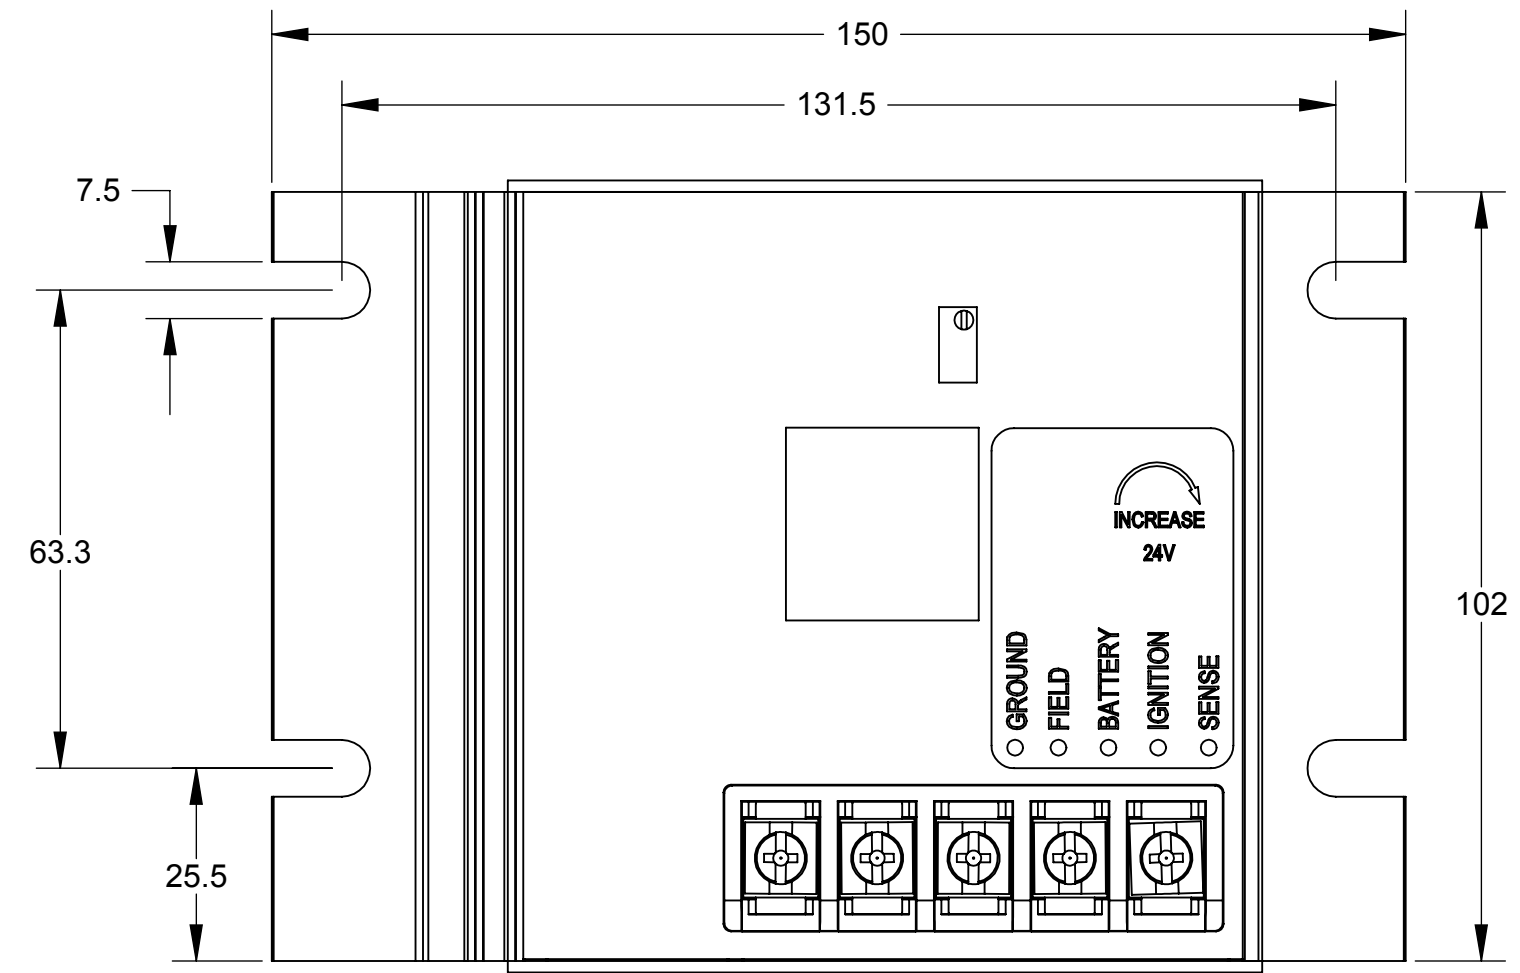

Prinoth #28024342

NOTES:

- *REGULATOR MASS 0.460 Kg
- *VOLTAGE SET POINT = 28.2V
- *ADJUSTABLE VOLTAGE SET POINT 27.0V to 29.0V
- *RATED OUTPUT 12 AMPS
- *POSITIVE FILED CONTROL (B CIRCUIT)
- *TEMPERATURE LIMITS: -40 degC to 105 degC

UNLESS OTHERWISE SPECIFIED
ALL DIM. ARE IN MM
DO NOT SCALE.
FLAT IS FOR REFERENCE ONLY.
TOLERANCES: .XX ± .10
.X ± 0.2
X ± 0.5
HOLES:
FRACT. ± .5°
ANGLES ± .5°
THIS SYMBOL REPRESENTS
A CONTROL DIMENSION.
CONTROL DIMENSIONS ARE CONSIDERED
TO BE A GOOD INDICATOR OF WHETHER
A MANUFACTURING PROCESS IS IN
CONTROL. THESE DIM. MUST HAVE A
MIN Cpk OF 1.33 FOR A SAMPLE
OF 31 CONSECUTIVE PIECES.

MATERIAL	
FINISH	
WHERE USED	
DR BY	BI Jan 17 2018
CHK'D	BI Jan 17 2018
SCALE	DATE

TITLE		REV	
EXTERNAL REGULATOR			
DWG NO.	3501-5025-OE	SHEET	SIZE
		10F1	B
 			

This drawing, and the design of the article represented herein, are the exclusive property of Dixie Electric Limited and are provided strictly on a confidential basis. The drawing and design shall be used only for the purposes for which they have been provided and shall not be produced, reproduced, altered, used, published or disclosed to others without the prior written consent of Dixie Electric Limited