BERMAN TECHNIEK B.V. +31 10 4610677
THE NETHERLANDS INFO@BERMANTEC.COM
BERMAN GMBH +49 2839 5688120
GERMANY KONTAKT@BERMANTEC.COM

BERMAN
BERMANTEC.COM

DELSTAR

HD BRUSHLESS / SERIES 250

100-25210,-D

28 Volts 320 Amps

PRODUCT SPECIFICATIONS

Part number	100-25210
System Voltage	24V
Rated Output	320A
Outout @ 2000 rpm	215A
Ground	Insulated
Mounting	J-180 - 4”
Rotation	Bidirectional
Temperature limits:	
Low	- 40ºC / -40ºF
High	110ºC / 230ºF
High	125ºC / 257ºF (with fresh air intake)
Speed limits:	7000 RPM continuous
	8000 RPM intermittent
Coating	Corrosion-Resistant E-Coated
Weight	62 Lbs / 28 Kg.
Regulator	Remote
Diode Trio (D+)	Indicator Light / Ignition
Remote Sense	M5 terminal
AC	M5 terminal

100-25210

100-25210-D
with air intake cover
& Optional 90^{0} elbow

NOTE:

*This DelStar **100-25210** alternator, meets the marine requirements for Ignition Protection on gas or diesel engines of ISO 8846, USCG, stated in Title 33 CFR 183.410, SAE J1171 and International CE Standards.*

PERFORMANCE CURVES

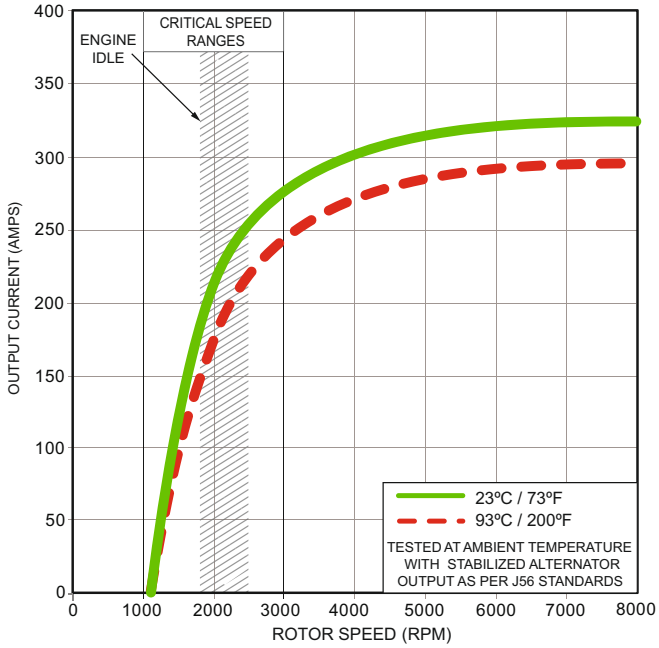

ACCESSORIES:

90º Elbow Pkg. (360º Rotatable) # 46900-1800

RECOMMENDED FOR:

- Coach & Transit Busses
- Marine
- Mining
- Construction, Industrial

BERMAN TECHNIEK B.V. +31 10 4610677
THE NETHERLANDS INFO@BERMANTEC.COM
BERMAN GMBH +49 2839 5688120
GERMANY KONTAKT@BERMANTEC.COM

BERMAN
BERMANTEC.COM

DELSTAR

HD BRUSHLESS / SERIES 250

OUTLINE

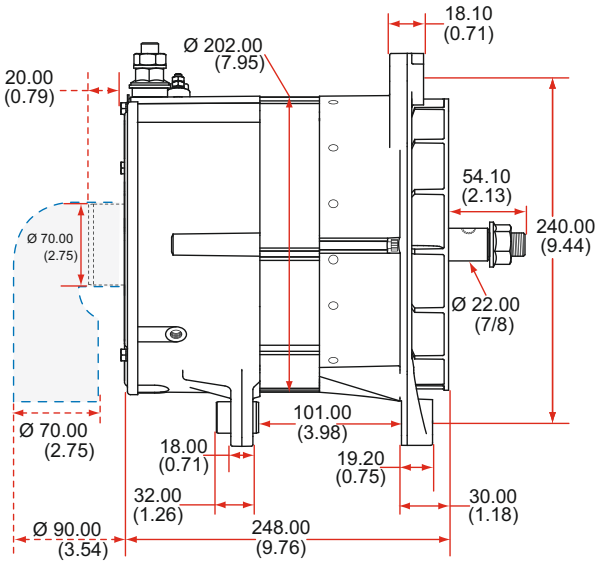

CONNECTIONS

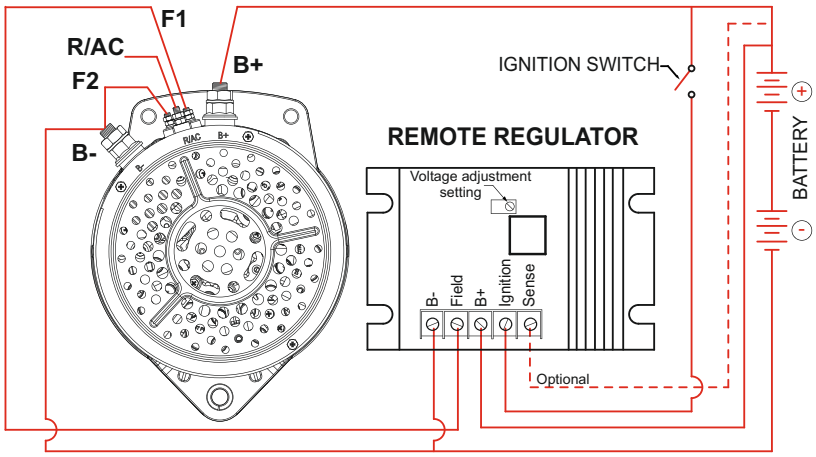

Dimensions are listed in mm over (in)

100-25210,-D

28 Volts 320 Amps
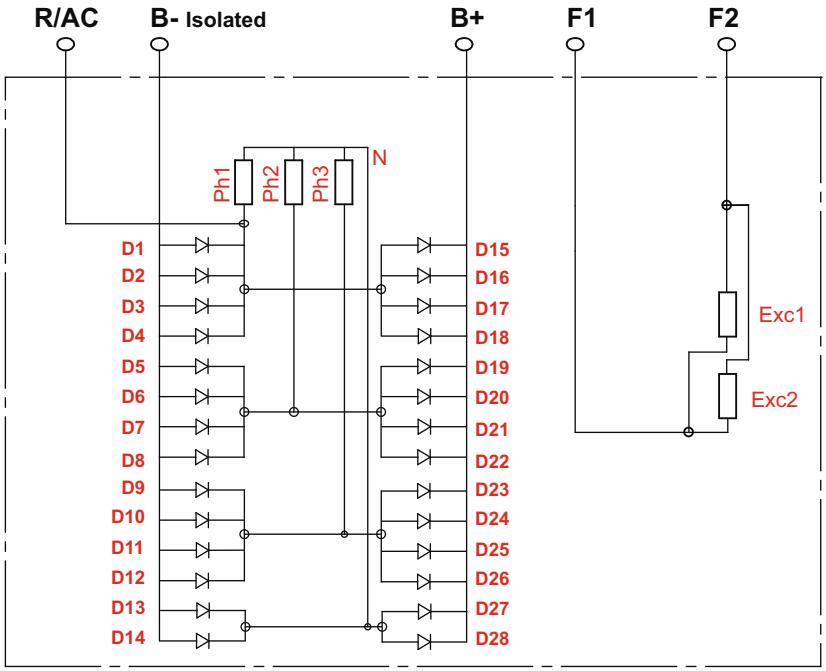
ELECTRICAL SCHEMATIC